

# Autotransformadores

## Autotransformadores para arranque a tensión reducida

Datos técnicos

### Datos para selección y pedidos


#### Autotransformador

Potencia de operación H.P.	Tensión de servicio V	Modelo	Número de Catálogo
10/20	220	ATR 110-11	A7B10000002658
25/30	220	ATR 110-13	A7B10000002660
40/50	220	ATR 110-15	A7B10000002662
60	220	ATR 111-11	A7B10000002664
75	220	ATR 111-13	A7B10000002666
100	220	ATR 112-1	A7B10000002670
10/20	440	ATR 110-12	A7B10000002659
25/30	440	ATR 110-14	A7B10000002661
40/50	440	ATR 110-16	A7B10000002663
60	440	ATR 111-12	A7B10000002665
75	440	ATR 111-14	A7B10000002667
100	440	ATR 111-16	A7B10000002669
150	440	ATR 112-2	A7B10000002671
200	440	ATR 113-1	A7B10000002672
300	440	ATR 113-2	A7B10000002673

#### Autotransformadores

Tipo ATR	H.P.	V	A	B	C	D	E	F (max.)	G	H	J	Peso kg
110-11/12	10/20	220/440	305	236	31.8	337	204	175	14.28	15.8	7.9	110
13/14	25/30	220/440	305	236	31.8	337	204	200	14.28	15.8	7.9	31
110-15/16	40/50	220/440	305	236	31.8	337	204	200	14.28	15.8	7.9	31
111-11/12	60	220/440	305	236	31.8	337	204	175	14.28	15.8	7.9	62
111-13/14	75	220/440	349	288	38	381	250	190	17.46	19	7.9	62
111-15/16	100	220/440	349	288	38	381	250	220	17.46	19	7.9	112-1
112-1	150	220/440	349	288	38	381	250	190	17.46	19	7.9	90
112-2	150	220	369	322	38	403	284	250	17.46	19	7.9	90
113-1	200	440	499	394	50.8	533	343	275	20.63	25.4	9.5	128
113-2	300	440	499	394	50.8	533	343	275	20.63	25.4	9.5	135

Vista Frontal

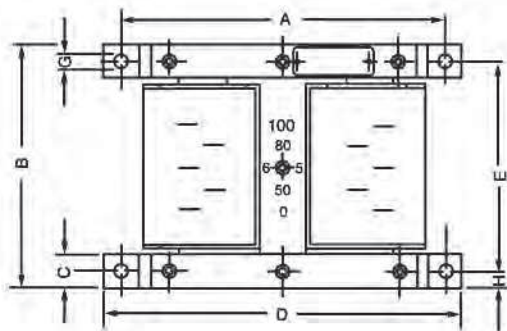

Vista Planta

