



Hammond Power Solutions

MONTERREY, MX GUELPH, ONT. BARABOO, WI COMPTON, CA



HPS EXPRESS™ L


TRANSFORMADOR TIPO SECO BARNIZADO
VARNISHED DRY TYPE TRANSFORMER

Modelo Part Number **EL1A0030MCAC**

No. de Serie Serial Number

AT/HV	480V 36.1A	Ref. de Cliente Customer Reference	
NBAI BIL	-	Fase Phase	3
TERM.	H1 H2 H3	Tipo TYPE	K
		Enfriamiento Cooling	ANN
		kVA	30
		Incremento de Temp. Temp. Rise	150 °C
		Clase de Temp. Temp. Class	220 °C
		Frecuencia Frequency	60 Hz
		Impedancia % Impedance % @ 170 °C	5.5
		Tipo de Gabinete Encl. Type	3R
BT/LV	220Y/127V 78.7A	Masa Del Núcleo Y Devanados lbs/kg C&C Wt.	220/100
NBAI BIL	-	Masa Total Total Wt. lbs/kg	275/125
TERM.	X0 X1 X2 X3	Material de Conductores de Devanados Winding Material	AL

VOLTIOS VOLTS	CORRIENTE CURRENT AMPS	% VOLTAJE NOMINAL % RATED VOLTAGE	CONEXIÓN POR FASE CONNECTION
504	34.4	105	1
480	36.1	100	2
460	37.7	96	3
440	39.5	92	4
418	41.4	87	5



SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES

d00022.1sp

FABRICADO EN/MADE IN MÉXICO



Hammond Power Solutions Inc.


TITLE: 3PH DISTRIBUTION TRANSFORMER NAMEPLATE INFORMATION			
			DES: PPICASSI
			DATE: 22/07/12
NO.	DATE	BY	REVISION
			SCALE: NTS

SHEET 1 OF 2

EDBEL1A0030MCAC

FRONT VIEW

SIDE VIEW


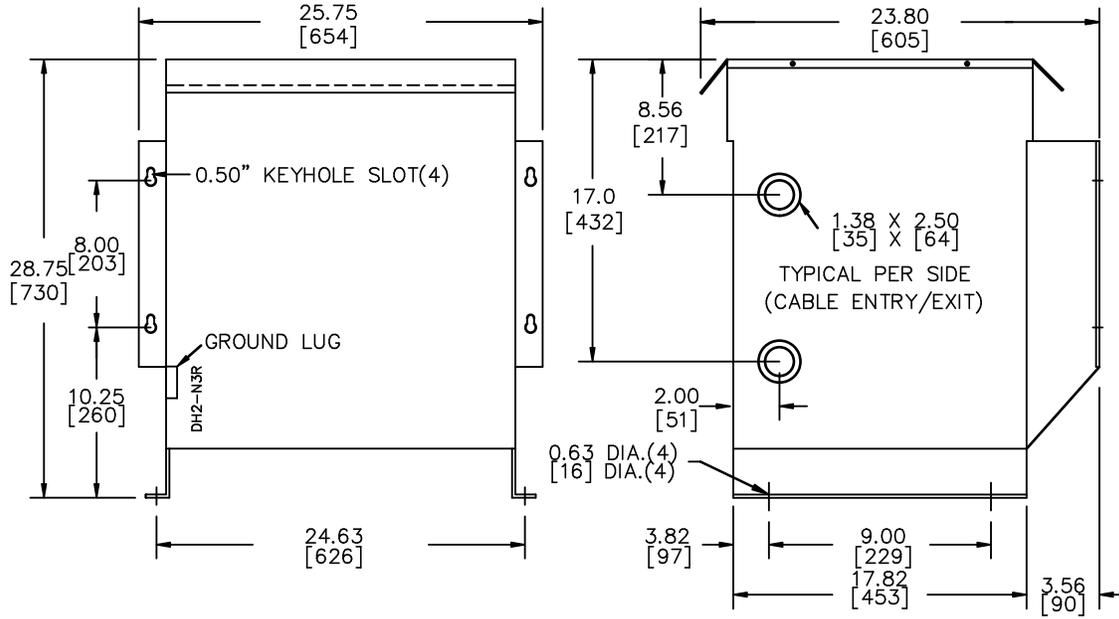


All Dimensions in inches[mm]

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

HV TERMINAL DETAIL

LV TERMINAL DETAIL



CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT TOP FRONT



TITLE: 3PH DISTRIBUTION TRANSFORMER

				DES: PPICASSI
				DATE: 22/07/12
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBEL1A0030MCAC